

PIUSI PANTHER EX56 SERIES



56
l/min




FEATURES

- ▶ Panther Pump can be used with AVGAS 100/100LL (pump only) and JET A/A1 (pump only)
- ▶ High Flow Rate
- ▶ Heavy Duty
- ▶ Continuous Duty
- ▶ Thermal Protection
- ▶ UL Version Available
- ▶ Removable Pump Feet
- ▶ Up to 56L/Min
- ▶ Power: 240V AC
- ▶ Magnetic Switch



Made in Italy

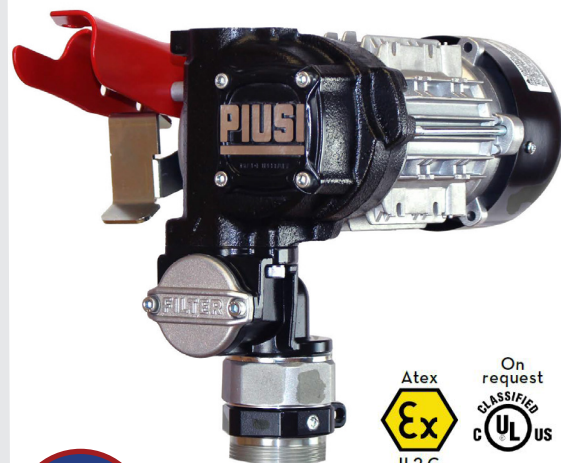

56
l/min



Panther EX 56 230V 50HZ Feet
Pump suitable for Aviation Fuel

Panther EX 56 230V 50HZ Drum
Pump suitable for Aviation Fuel

HIGH PERFORMANCE | HIGH PRESSURE | CONTINUOUS DUTY

The new PANTHER EX56 AC pump series by PIUSI, designed for Heavy Duty applications, delivers superior performance and uncompromising reliability. Resulting from advanced research and development, this pump sets new standards with a flow rate of 56 l/min, the highest in its category. Capable of maintaining high performance even at high pressures, the PANTHER EX56 is ideal for various tank configurations and accessories, ensuring efficiency and versatility in every application.

KIT CONTENTS

Panther EX 56 - Drum Version

- ▶ Panther EX 56 - Drum
- ▶ Nozzle Holder
- ▶ Drum Connector
- ▶ Instruction Manual

Panther EX 56 - Feet Version

- ▶ Panther EX 56-Feet
- ▶ Non-Mounted Feet
- ▶ Instruction Manual


MATERIALS

- ▶ Body - Cast Iron
- ▶ Rotor - Sintered Steel
- ▶ Vanes - Technopolymer
- ▶ Seal - Viton
- ▶ Shaft - Steel


DETAILS

- ▶ On/Off Switch
- ▶ Vane Motor
- ▶ Bypass Valve



Panther EX 56 - Feet Version

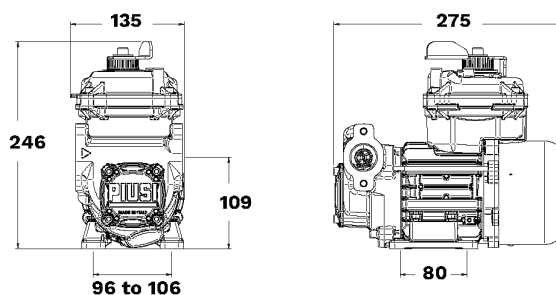


Panther EX 56 - Drum Version



Dimensions - Expressed in Millimetres



PIUSI PANTHER EX56 SERIES

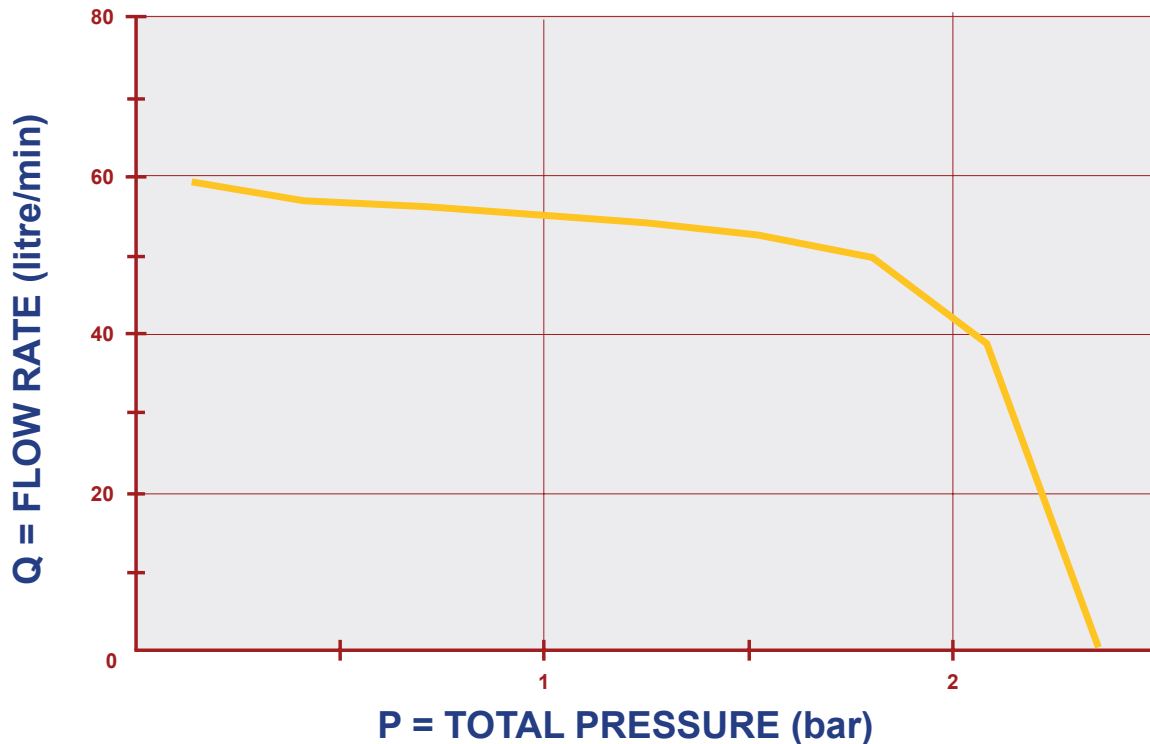

TYPE OF FLUID Petrol

TEMPERATURE 20°C

TECHNICAL DATA

CODE	DESCRIPTION	METER ATEX	FLUID TYPE*	FLOWRATE		VOLTAGE			DUTY CYCLE CONTINUOUS	RPM	INLET	OUTLET
				L/MIN	GPM	AC VOLT /HZ	POWER WATT	AMP MAX			BSP	BSP
F00580000	Panther EX 56 230V 50HZ Feet	-	D, P, K, A**, J**	56	14.7	230V/50HZ	500	2.3	S1	2800	1"	1"
F00580010	Panther EX 56 230V 50HZ Drum	-	D, P, K, A**, J**	56	14.7	230V/50HZ	500	2.3	S1	2800	1"	1"

TECHNICAL DATA

CODE	DESCRIPTION	METER ATEX	FLUID TYPE *	FLOWRATE		VOLTAGE			DUTY CYCLE CONTINUOUS	RPM	INLET	OUTLET
				L/MIN	GPM	AC VOLT /HZ	POWER WATT	AMP MAX			BSP	BSP
F00580000	Panther EX 56 230V 50HZ Feet	K33	D, P, K	56	14.7	230V/50HZ	500	2.3	S1	2800	1"	1"
F00580010	Panther EX 56 230V 50HZ Drum	K33	D, P, K	56	14.7	230V/50HZ	500	2.3	S1	2800	1"	1"

* (D) - DIESEL, (P) - PETROL, (K) - KEROSENE, (A) - AVGAS, (J) - JET A/A1

** Piusi Panther EX 56 can be used with AVGAS 100/100LL (pump only) and Jet A/A1 Fuels (pump only)

11 Camomile Way,
Bibra Lake
W.A, 6163

Phone: (08) 6166 3860
E-mail: admin@rtrswa.com.au



To discover more about our services, products and projects please visit www.rtrswa.com.au