



Piusi Cube Diesel Dispenser Bowser

Available in 57, 70 & 90 L/Min variants


Diesel fuel dispensing bowser for non-commercial use. The sturdy structure designed is suitable for different applications, it can be fixed to walls, tanks cisterns, drums, special pedestals. The Piusi cube is fitted with a Panther Pump and uses a Piusi K33 meter.

Performance


- ▶ Flow rate up to 90 l/min
- ▶ Accuracy: +/- 0.1 %
- ▶ AC and DC versions available
- ▶ Noise level below 75 dB

Optional Extras

- ▶ Kit Wall Support
- ▶ Water Captor Filter
- ▶ Pedestal
- ▶ DC Version
- ▶ 2" Quick coupling
- ▶ 2" Drum connector

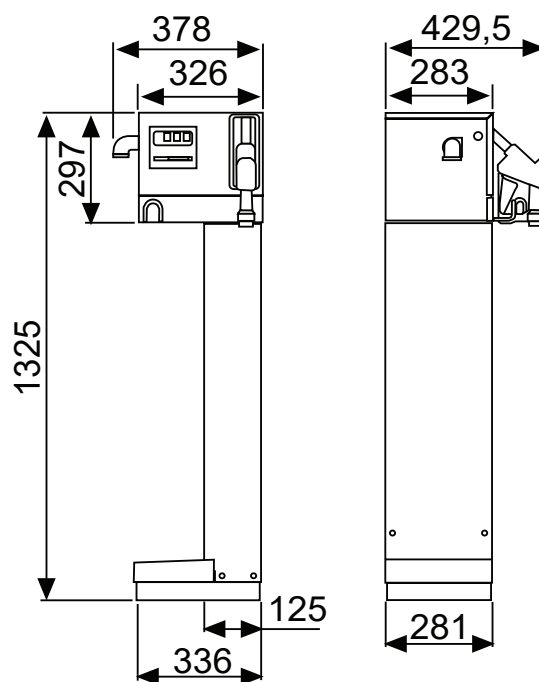

Kit Wall Support



Water Captor filter



Pedestal





Product's Range - Weight & Packaging

Code	Weight		Packaging		No. Boxes/Europallet	
	kg	lbs	MM	pcs / box	Plane	Ship
00057500C	21	46	400x400x460	1	12	24
F0059100A	21	46	400x400x460	1	12	24
F0057600C	21	46	400x400x460	1	12	24
F0057700C	21	46	400x400x460	1	12	24
F00575400	22	46	400x400x460	1	12	24
F00591200	22	46	400x400x460	1	12	24
F00592000	21	46	400x400x460	1	12	24

Product Range - Technical Data

Code	Description	Fluid Type	Flow-Rate		Voltage			Pump Mod.	Meter Mod	Nozzle Type	Inlet BSP	Filter		Hose	
			l/min	gpm	AC. V/ Hz DC Volt	Power Watt	Amp. Max.					Filter H2O filter	Filter capacity	Length	Ø
00057500C	Cube 56	D	56	15	230/50	350	3	Panth 56	K33	Auto	1"	NO	-	4 m	3/4"
F0059100A	Cube 70/33	D	70	18	230/50	500	4.2	Panth 72	K33	Auto	1"	NO	-	4 m	1"
F0057600C	Cube 56 DC 12V	D	56	15	12	300	35	Panth DC	K33	Auto	1"	NO	-	4 m	3/4"
F0057700C	Cube 70 DC 24V	D	70	18	24	420	25	Panth DC	K33	Auto	1"	NO	-	4 m	1"
F00575400	Cube 56/33 + Filter	D	56	15	230/50	350	3	Panth 56	K33	Auto	1"	YES	30 µ	4 m	3/4"
F00591200	Cube 70/33 + Filter	D	70	18	230/50	500	4.2	Panth 72	K33	Auto	1"	YES	30 µ	4 m	1"
F00592000	Cube 90/44	D	90	23.8	230/50	700	4.9	Panth 90	K33	Auto	1"	NO	-	4 m	1"

11 Camomile Way,
Bibra Lake
W.A, 6163

Phone: (08) 6166 3860
E-mail: admin@rtrswa.com.au

